



产品规格书

PRODUCT SPECIFICATION

客户名称Buyer Name	
客户料号Buyer Part No.	
客户承认签章 Buyers Approval & Signatures	

文件编号Spec No.		版本	A/1
品名描述 Product Description	无刷直流振动马达 BLDC Vibration Motor		
型号Part No.	VW0625AB001G		
送样日期Date			
设计Designed by	审核Checked by	批准Approved by	
			
2020.07.01	2020.07.01	2020.07.01	

www.vybronic.com
sales@vybronic.com

NO	ITEM	Page
1	Revision History	3
2	Scope	4
3	Contents	4
4	Standard Test Condition	4
5	Judgment Environmental Condition	5
6	Test Tolerance	5
7	Electrical Characteristics	5
8	Mechanical Characteristics	6
9	Graph Characteristic Graph	6
10	Reliability Test	7~8
11	Caution	9
12	Specification Change	10
13	Drawing	11

1. Revision History

修改号 Rev. No.	日期 Rev. Date	页码 Page No.	修改项目 Revised Item	更改原因 Reason
A/0	2019.02.19	/	产品颁布/ Release for Production	
A/1	2020.07.01	/	changed company name from JINLONG MACHINERY to VYBRONICS, changed part # from W0625AB001G to VW0625AB001G	Rebranding



2. Scope

This specification is applies to VW0625AB001G vibration motors to be used for mobile telephone or IT devices.

3. Contents

No.	Item	Specification
3-1	Operating Voltage Range	DC 2.7V ~ 3.3V
3-2	Storage Temperature Range	(-)40 ~ (+)85℃ There should be no condensation
3-3	Operating Temperature Range	(-)20 ~ (+)60℃ There should be no condensation
3-4	Operating Position	All Direction

4. Standard Test Condition

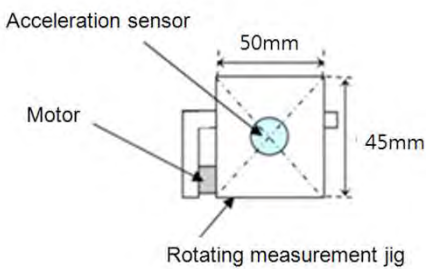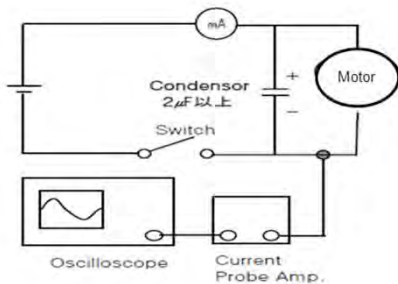No.	Item	Specification
4-1	Temperature	20±3℃
4-2	Humidity	65%±20% RH
4-3	Measurement Voltage	DC3.0V
4-4	<div style="display: flex; justify-content: space-around; align-items: flex-start;"> <div style="text-align: center;">  <p>Acceleration sensor</p> <p>Motor</p> <p>Rotating measurement jig</p> <p>50mm</p> <p>45mm</p> </div> <div style="text-align: center;">  <p>mA</p> <p>Condensor 2μF 以上</p> <p>Switch</p> <p>Motor</p> <p>Oscilloscope</p> <p>Current Probe Amp.</p> </div> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="border: 1px solid black; padding: 5px; background-color: #e6f2e6; width: 45%;"> Standard Measurement State </div> <div style="border: 1px solid black; padding: 5px; background-color: #e6f2e6; width: 45%;"> Inspection Circuit Diagram </div> </div> <ul style="list-style-type: none"> - Jig : 50x46x45mm [Material is POM] - Weight: 150g - The vibrator is Clamped firmly (0.5~1Kg pressure) on a test fixture 	

5. Judgment Environmental Condition

NO	Item	Condition
5-1	Temperature	$20 \pm 3^{\circ}\text{C}$
5-2	Humidity	$65\% \pm 20\% \text{RH}$

6. Test Tolerance



Test set-ups and equipment shall be capable of maintaining following condition, unless otherwise specified.

NO	Item	Condition
6-1	Room Temperature & Humidity	$20 \pm 15^{\circ}\text{C} / 65 \pm 20\% \text{RH}$
6-2	Test Chamber Temperature	Limits $\pm 3^{\circ}\text{C}$
6-3	Voltage	Limits $\pm 0.15\text{V}$


7. Electrical Characteristics

No	Item	Test Condition	Condition
7-1	Rated Voltage		DC 3.0V
7-2	Rotating Direction	CW [Lead Wire Red(+), Black or Blue(-) CW [Lead Wire Red to (+), Black or Blue to (-)	CW
7-3	Rated Load Speed	It is based on the standard measurement condition of the section 4.	$15,000 \pm 3,000$ rpm
7-4	Rated Load Current		90 mA max
7-5	Starting Current		175 mA max
7-6	Starting Voltage	Test based on the standard measurement condition of the section 4-1, 4-2, and 4-4.	DC 2.5 V max
7-8	Insulation Voltage	Measured between terminal and case with DC100V Megger.	10 MΩ min

8. Mechanical Characteristics

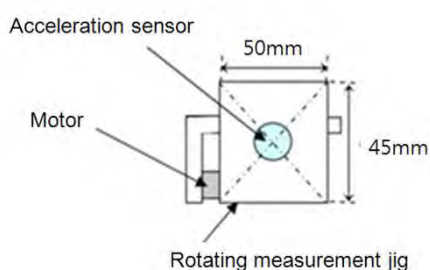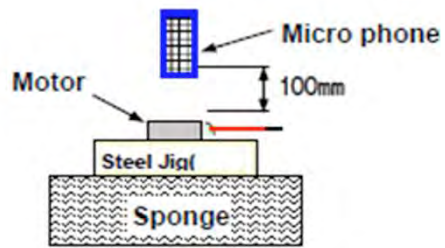NO	Item	Specification	Condition
8-1	Vibration Force	- 50x46x45mm [Material is POM] - Weight : 150g - The vibrator is Clamped firmly (0.5~1Kg pressure) on a test fixture, 	It is referred to the rated load speed of the section 7-3
8-2	Mechanical Noise	- Motor shall be fixed on Jig by adhesive tape - Jig Material 	50dB MAX * 24dB
8-3	Weight		about 0.90g

9. Graph. Characteristic Graph

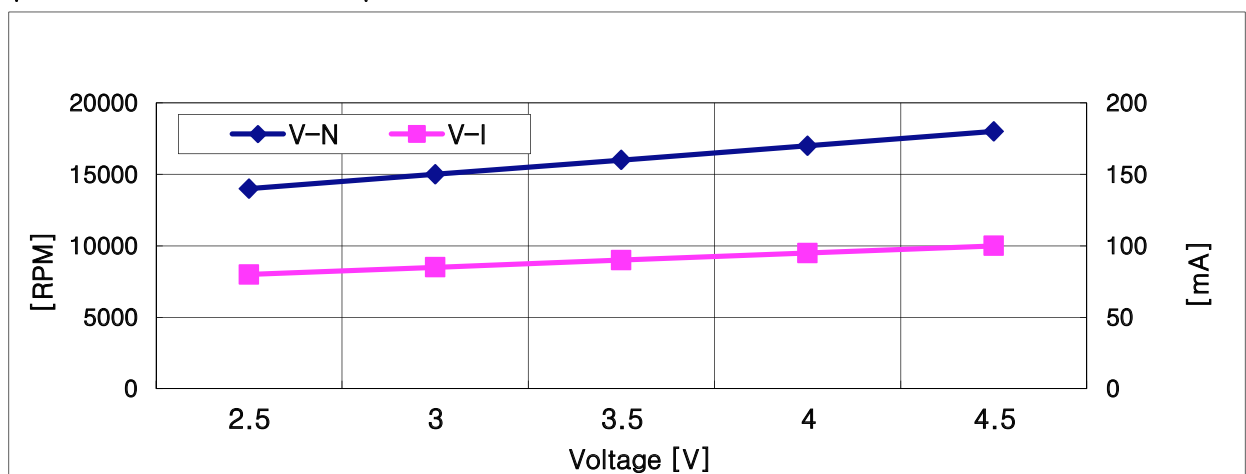

10. Reliability Test

NO	Item	Test Condition			Specification
10-1	Life Test	Item			-Rated Load Speed: Initial value +40, -20% Or within rated load speed
			Room Temp. & Humi. L/T	High Temp. & Humi. L/T	
		Voltage	DC 3.0V	DC 3.0V	
		Temperature	20±15℃	40℃	
10-2		Humidity	65±20% RH	90% RH	-Rated Load Current: Initial value±30%
		Life cycles	1,000,000 cycles	300,000 cycles	
		Duty Cycle	0.5 sec ON / 0.5 sec OFF	0.5 sec ON / 0.5 sec OFF Motor shall be fixed on Jig by adhesive tape. (Refer to the section 4-4)	
10-3	Composite Test	.Conduct the continuous running for 10 hours as following Then storage at 60℃ 90% for 500hours			(Rated Load Speed: Initial value ±20%, or within rated load speed) (Rated Load Current: Initial value ±30%)
10-4	Low Temperature Storage Performance	Exposed to -40℃ for 500 hours and then room temperature for 4 hours.			
10-5	High Temperature Storage Performance	-Exposed to +85℃, 60%RH for 500 hours and then room temperature for 4 hours.			
10-6	High Temperature and Humidity Storage Performance	-Exposed to +60℃, 90%RH for 500 hours and then room temperature for 4 hours.			

10. Reliability Test

NO	Item	Test Condition	Specification
10-7	Thermal Shock Test	<p>Total 200cycles at -40℃ and +85℃ for 30min each (1cycle=1 H)</p> <p>—</p> <p>Temperature Change Time < 5min</p> <p>—</p> <p>Motor shall be measured after exposure at room temperature for 4 hours.</p>	<p>(Rated Load Speed: Initial value $\pm 20\%$, or within rated load speed)</p> <p>(Rated Load Current: Initial value $\pm 30\%$)</p>
10-8	Drop Test	<p>Dummy set (about 100g) motor shall be dropped</p> <p>Onto concrete plate. 3times each side of 6 directions from a height of 150 cm, total 18 times.</p>	
10-9	Vibration Test	<p>Standard-packed motor is subjected to sine wave 10Hz~55Hz. X, Y, Z directions for 2 hours each, total 6 hours.</p>	





11. Caution

NO	Item	Specification
13-1	Operating Range	-When using on the operating condition different from a standard, a problem can be generated to the performance and the life of a product.
13-2	Storage	- Avoid from placing motor for long term of six months under environmental condition of high temperature or extreme humidity, or motor may be deteriorated.
13-3	Motor Handling	<p>To handle the motor, hold the case softly.</p> <p>.</p> <p>.</p> <p>Do not bring a magnetized object or attracted object by the magnet of motor, or such object may deteriorate a performance of motor.</p> <p>Input short to the motor due to mis-operating, Drive IC of the motor inside can be damaged. To avoid this problem, please add capacitor of 2uF or more between the power lines in parallel with the motor.</p> <p>Supplying voltage more than DC4.5V can make IC out of function.</p>

12. Specification Change

Even when there is any change to this specification, change application report which has the information of details

- of the change, lot of product, and etc shall be presented to customer before that change being carried out.
- And mutual discussion may be necessary before the change being carried out. Revision history shall be recorded on to the specification sheet when the change record and approval may be required.

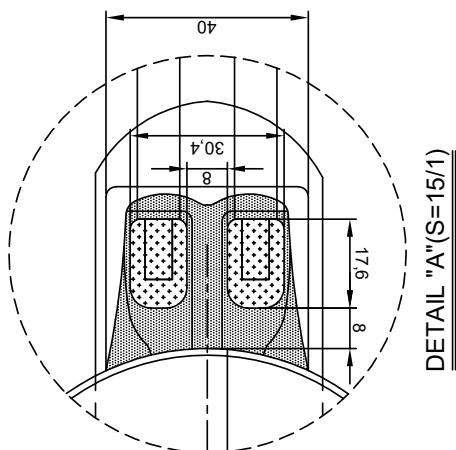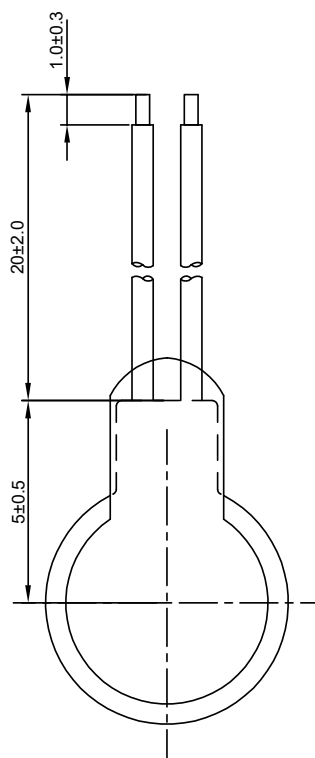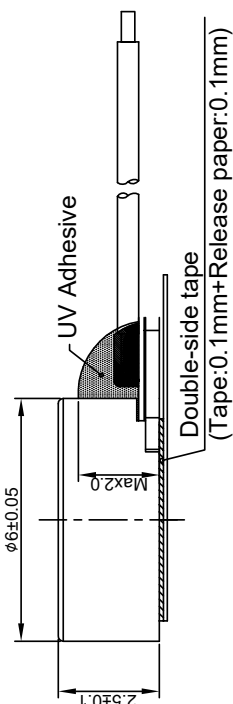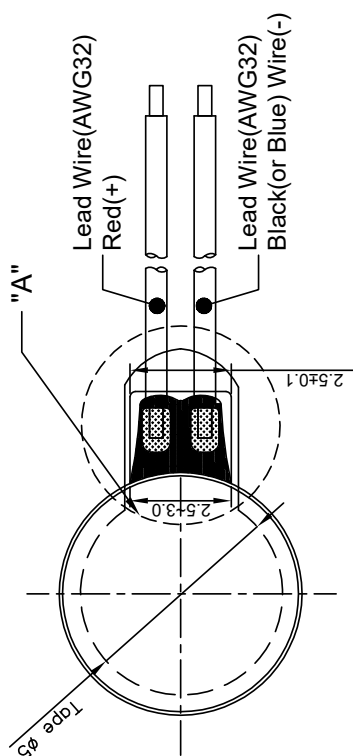

SPECIFICATION

1. RATED VOLTAGE : DC 3.0V
2. RATED CURRENT : 90 mA Max
3. SPEED : 15,000±3,000 RPM
4. STARTING VOLTAGE : DC 2.5V Max
5. DIRECTION OF ROTATION : CW

[illegible]