

DEMAND THE BEST IN TILE & STONE INSTALLATION PRODUCTS

Sienna

TILE & STONE INSTALLATION PRODUCTS



BUYER'S GUIDE

THE COMPLETE LINE OF SIENA PRODUCTS



TO OUR VALUED CUSTOMERS



Siena Tile and Stone Installation Products prides itself on being a leader in the commercial and residential construction markets. Siena features a full line of thin and medium set specialty mortars, waterproofing and anti-fracture membranes, self-leveling, deck mud and wall float, masonry mortars, grouts, caulking, sealers and admixtures. Our state of the art manufacturing facilities, unsurpassed quality control, and our commitment to customer service has made us the professional's choice for over 35 years.



Siena is committed to our customers' satisfaction, offering the best in both products and service. We are proud of our role as a leader in the development of new and innovative products for the tile and stone installation industry. Our comprehensive product line makes Siena a complete, seamless solution for your tile and stone installation projects. Our broad range of 36 standard grout colors, plus custom color matching, gives your customers the choices they need to insure a perfect color match.



A division of Omega Products International, Siena's high quality line of products are backed by the most complete line of exterior stucco wall systems and decorative finishes in the construction market today.

This Buyer's Guide is intended to give you the product data you need to ensure you are delivering the right products to your customers at competitive industry prices. Please visit our website for additional product information, MSDS, a photo gallery, technical data, material calculator, and be sure you are listed on our distributor locator. www.SienaProducts.com.

LIMITED 10 YEAR WARRANTY

Siena Tile & Stone Installation Products [Siena], a division of Omega Products International, Inc. [Omega] warrants that the Siena products listed in this buyer's guide to be free from manufacturing defects under normal usage and conditions for a period of Ten (10) years from the date of purchase when installed in accordance with product specifications, current TCNA (Tile Council of North America) guidelines and practices on properly prepared substrates. It is the responsibility of the owner, builder and/or contractor to obtain and understand Omega and Siena's literature, specifications and appropriate published reports such as, but not limited to the current TCNA handbook, product data sheets, technical bulletins. In order for this warranty to apply, the entire installation must be performed with one or more of the Siena products listed in this buyer's guide. Omega is not responsible for workmanship that is not in accordance with the product specifications, product data sheet instructions, TCNA guidelines and practices, and/or improperly prepared substrates. Structural movement, cracking, excessive deflection, flooding and/or water damage, acts of God or any failures to the substrate are not covered under this warranty. Shading and Efflorescence are inherent in all cement based products and are not considered a manufactures defect. Exterior installations over substrates with steel or wood framing do not apply to this warranty. Omega and Siena will not be responsible for failures when the use of non-specified products, competitor, or any product is used to alter the original formulation of the products that is not in accordance with specifications on the product's data sheet, and such uses and/or alterations will void this and all Omega and Siena warranties. This warranty is not transferable or assignable. Visit our website for exclusions and claims information associated with this warranty at www.SienaProducts.com.



TABLE OF CONTENTS

Non-Modified Mortars

Siena ThinSet 510 Non-Modified Mortar	2
Siena Premium Set 550 Non-Modified Mortar	2
Siena Fast Set 595 Non-Modified Mortar	2

Polymer-Modified Mortars & Adhesives

Siena Fast Set Pro M75 Polymer-Modified Mortar	2
Siena Multi Purpose M100 Polymer-Modified Mortar	3
Siena Multi Plus Pro M200 Polymer-Modified Mortar	3
Siena Pro Set Flex M300 Polymer-Modified Mortar	3
Siena Glass Tile Pro M375 Polymer-Modified Mortar	3
Siena Elasto Pro EP200 Latex-Modified Mortar & Membrane	4
Siena Mastic 625 Adhesive	4
Siena Crete Admix AX400 Admixture & Siena Crete Powder	4
Siena Medium M225 Polymer-Modified Mortar	5
Siena Medium Set Pro M400 Polymer-Modified Mortar	5

Type S & Stone Veneer Mortars

Siena Type S Mortar – Stone Veneer Mortar	5
Siena Stone Veneer Mortar (SVM)	5
Siena Premium Stone Veneer Mortar – Poly-Modified	6

Surface Preparation & Self-Leveling Underlayment

Siena Deck Mud Mortar	6
Siena Wall Float Mortar	6
Siena Self-Leveling Underlayment (SLU)	6
Siena Self-Leveling Underlayment (SL20)	7
Siena Self-Leveling Primer	7

Waterproofing & Anti-Fracture

Siena Dragon Skin Waterproofing & Anti-Fracture Membrane	7
Siena Fracture Shield Water-Resistant & Anti-Fracture Membrane	7

Penetrating Sealers

Siena Masonry & Surface Sealer	8
Siena Penetrating Grout & Surface Sealer	8
Siena Premium Penetrating Grout & Surface Sealer	8

Epoxy, Sanded & Non-Sanded Grouts

Siena Non-Sanded Grout NS200	8
Siena Epoxy Grout & Mortar	9
Siena Sanded Grout GS300	9

Caulking & Grout Stain


Siena Caulk CX300	9
Siena Grout Stain ST300	9

Admixtures & Hardiebacker

Siena Admix AX100 Admixture	10
Siena Admix AX300 Admixture	10
Hardiebacker Board	10



NON-MODIFIED THIN SET MORTARS



Sienna ThinSet 510

An economical mortar used to install basic ceramic and porous tiles and stones. Sienna ThinSet 510 is a dry-set mortar manufactured with portland cement, to produce a high quality non-modified mortar with good bond strength and coverage. Sienna ThinSet 510 is used in interior and exterior applications of porous tiles and stones. Sienna ThinSet 510 can be used on floors, walls and in mortar beds up to 3/16" in residential and light commercial projects. Sienna ThinSet 510 is available in either white or grey, and complies with the requirements of ANSI A118.1. If used in conjunction with Sienna Acrylic Admix AX100 or AX300, it will also comply with the requirements of ANSI A118.4 and ANSI A118.11.

Coverage

Notch Trowel – Coverage May Vary.

- 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)
- 1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)
- 1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

- X130-0050**Grey
- X130-0150**White

COLOR



Sienna Premium Set 550

A premium mortar use with Schluter™ Ditra Systems™ and used to install tiles and stones. Sienna Premium Set 550 is a dry-set mortar manufactured with portland cement, to produce a high quality non-modified mortar with high bond strength and great coverage. Sienna Premium Set 550 is used in interior and exterior applications of most tiles and stones. Sienna Premium Set 550 can be used on floors, walls and in mortar beds up to 3/16" in residential and commercial projects. Sienna Premium Set 550 is available in either white or grey, and complies with the requirements of ANSI A118.1. If used in conjunction with Sienna Acrylic Admix AX100 or AX300, it will also comply with the requirements of ANSI A118.4 and ANSI A118.11.

Coverage

Notch Trowel – Coverage May Vary.

- 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)
- 1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)
- 1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

- X130-0250**Grey
- X130-0350**White

COLOR



Sienna Fast Set 595

A fast setting dry-set mortar manufactured with portland cement to produce a high quality non-modified mortar. Sienna Fast Set 595 enables the install and grouting to be done within two hours, and is ready for foot traffic in four hours, and is used whenever a job must be done in one day or less. Sienna Fast Set 595 is available in either white or gray, and complies with the requirements of ANSI A118.1. Sienna Fast Set 595 is used for interior and exterior application of porous tiles and stones. Sienna Fast Set 595 can be used on floors, walls and in mortar beds up to 3/16" in residential and light commercial projects. If modified fast set mortar is needed use Sienna Fast Set Pro M75. Do Not use any Admixtures with this product.

Coverage

Notch Trowel – Coverage May Vary.

- 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 45 ft² (4.2 m²)
- 1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 35 ft² (3.3 m²)
- 1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 25 ft² (2.3 m²)

Packaging

25 lb (11.35 kg) bags


Pallet Quantities

100 bags per pallet – 2,500 lbs (1,135 kg) net

SKU

- X130-2225**Grey
- X130-2235**White

COLOR



Sienna Fast Set Pro M75 (poly-modified)

A fast setting dry-set mortar manufactured with portland cement to produce a high quality modified mortar. Sienna Fast Set Pro M75 enables the install and grouting to be done within two hours, and is ready for foot traffic in four hours, and is used whenever a job must be done in one day or less. Available in either white or gray, and complies with the requirements of ANSI A118.1. Used for interior and exterior application of most tiles and stones. Sienna Fast Set Pro M75 can be used on floors, walls and in mortar beds up to 3/16" in residential and commercial projects. If non-modified fast set mortar is needed use Sienna Fast Set 595.

Coverage

Notch Trowel – Coverage May Vary.

- 1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 45 ft² (4.2 m²)
- 1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 35 ft² (3.3 m²)
- 1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 25 ft² (2.3 m²)

Packaging

25 lb (11.35 kg) bags

Pallet Quantities

100 bags per pallet – 2,500 lbs (1,135 kg) net

SKU

- X130-2325**Grey
- X130-2335**White

COLOR



POLYMER-MODIFIED THIN SET MORTARS

Siena Multi Purpose M100

An economic polymer-modified mortar manufactured with portland cement to produce a high quality mortar with good bond strength, open time and coverage. Siena Multi Purpose M100 is used in a wide variety of installs over cured cement and concrete slabs, masonry, brick, backer board, and properly prepared ceramic tile. Used in interior and exterior applications of most tiles and stones, and can be used on floors, walls and in mortar beds up to 3/16" for residential and light commercial projects. Available in white and grey, and complies with the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-0450Grey

X130-0550White

COLOR



Siena Multi Plus Pro M200

A premium multi-purpose polymer-modified mortar manufactured with portland cement to produce a high quality mortar with exceptional bond strength, great open time and coverage, and is used to install porcelain and other types of high dense, non porous tiles and stones. Siena Multi Plus Pro M200 is used in a wide variety of installs over cured cement and concrete slabs, masonry, brick, backer board, properly prepared ceramic tile. Siena Multi Plus Pro M200 is used in interior and exterior applications of most tiles and stones, and can be used on floors, walls and in mortar beds up to 3/16" for residential and commercial projects, and can be used over Exterior Grade Plywood (EGP). Siena Multi Plus Pro

M200 is available in white and grey, and complies with the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-0650Grey

X130-0750White

COLOR



Siena Pro Set Flex M300

A premium flexible polymer-modified mortar manufactured with portland cement to produce a high quality mortar with exceptional bond strength, higher flexibility, greater open time and coverage, and is used to install porcelain and other types of high dense, non porous tiles and stones. Used as a flexible mortar for interior and exterior applications of most tiles and stones. Can be used on floors, walls and in mortar beds up to 3/16" in residential and commercial projects. Siena Pro Set Flex M300 will span cracks up to 1/16" (1.6 mm) in substrates with limited vibration and deflection, and can be used over exterior grade plywood (EGP).

Available in white or grey, and complies with the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-0850Grey

X130-0950White

COLOR



Siena Glass Tile Pro M375

A high performance, premium flexible polymer-modified mortar designed to give superior bond strength to the most demanding tile and stone installations. Siena Glass Tile Pro M375 is manufactured with portland cement and proprietary additives to produce a flexible, high quality tile and stone adhesive, with non-sagging and mildew resistant properties. Siena Glass Tile Pro M375 has exceptional strength, adhesion, open time and coverage beyond other premium mortars. Siena Glass Tile Pro M375 is used in interior and exterior application of most tiles, stones, decorative glass or metal tiles, pavers, brick, thin brick, and stone veneers. Siena Glass Tile Pro M375 can be used on floors, walls and in mortar beds up to 3/16" in residential and commercial projects. It is available in

gray, and in a consistent white color for translucent tiles, and will span cracks up to 1/8". Siena Glass Tile Pro M375 exceeds the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities

56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-2650Grey

X130-2750White

COLOR





SPECIALTY POLYMER MODIFIED THIN SET MORTARS • ADHESIVES

Siena Elasto Pro EP200

An exceptional elastomeric modified mortar and anti-fracture membrane manufactured with acrylic polymers and portland cement to produce a high quality flexible mortar with unmatched strength and flexibility. Siena Elasto Pro EP200 is specially formulated for the installation of most tiles and stones over substrates susceptible to deflections up to 1/240 of span. As an anti-fracture membrane, it can isolate preexisting and stress cracks, and prevent them from transferring through to the finished goods. Siena Elasto Pro EP200 can be used in interior and exterior applications, on floors or walls in residential and commercial projects. Siena Elasto Pro EP200 is available in white or grey, and is a two part product (Elasto Mix AX200 & Elasto Pro EP200 Powder). Exceeds ANSI A108.5, ANSI A118.12.



Coverages

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 75 ft² (7.0 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 55 ft² (5.1 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 45 ft² (4.2 m²)

Membrane Coverage May Vary.

Thickness at 1/16" (1.6 mm) - 95 ft² (8.8 m²)

Packaging

25 lb (11.35 kg) bags, 2 gallon (7.56 L) jugs

Pallet Quantities

64 – 2 gal. jugs per pallet, 1,100 lbs (498 kg) net

100 bags per pallet – 2,500 lbs (1,135 kg) net

SKU

X130-1750**Grey**

X130-1850**White**

COLOR

Siena Mastic 625

A non-slip high performance, smooth spreading premium mastic formulated for interior installation of all types of wall and floor tiles on vertical or horizontal surfaces. Siena Mastic 625 is a Type 1 organic mastic adhesive used to install most tiles and stones. Organic mastics are not recommended for exterior use. Siena Mastic 625 can be used to install ceramic tile, mosaics tiles, glazed wall tile, quarry tile, slate and pavers, up to 12" x 12". Siena Mastic 625 is non-flammable, freeze-thaw stable to 10° F and exceeds ANSI-A-136.1.



Coverage

Notch Trowel – Coverage May Vary.

1/8" x 1/8" x 1/8" (3.2 x 3.2 x 3.2 mm) - 80 ft² (2.0 m²)

1/4" x 1/4" x 1/4" (6.4 x 6.4 x 6.4 mm) - 30 ft² (1.0 m²)

1/4" x 1/4" x 3/8" (6.4 x 6.4 x 9.5 mm) - 40 ft² (1.0 m²)

3/16" x 5/32" (4.8 x 4.8 x 4.0 mm) - 60 ft² (2.0 m²)

Packaging

1 gal. (3.78 L) jugs, 3.5 gal. (13.25 L) pails

Pallet Quantities

128 – 1 gal. jugs per pallet, 1,075 lbs (487 kg) net

48 – 3.5 gal. pails per pallet, 1,411 lbs (639 kg) net

SKU

X130-1450 **1 gal.**

X130-1550 **3.5 gal.**

SIZE

Siena Crete Admix AX400 & Siena Crete Powder

A premium admixture designed to be used with Siena Crete Powder or a site mixture of sand and cement to create a premium polymer-modified mortar, which offers higher bond strength, greater flexibility, resistance to frost, longer open time and better coverage than standard mortars. Siena Crete Admix AX400 is used in demanding applications of tile, stone, brick, and thin brick installs, high moisture environments, and heavy traffic areas. The increased flexibility allows for substrate adjustments from climate and temperature changes without shearing. Siena Crete Admix AX400 can be used on floors, walls and in mortar beds as thin as 3/32" in interior and exterior, residential and commercial projects. Siena Crete Powder is available in white or grey, and complies with the requirements of ANSI A118.4, and is certified by H.C. Muddox Interstate Brick.



Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

AX400 – 5 gal (18.9 L) pails

AX400 – 55 gal (208.2 L) drum

Siena Crete Powder – 50 lb (22.7 kg) bag

Pallet Quantities

32 – 5 gal. pails per pallet, 2,080 lbs (942 kg) net

56 bags per pallet – 2,800 lbs (1,271 kg) net

AX400 SKU

X130-0305 **5 gal.**

X130-0306 **55 gal.**

SIZE

CRETE POWDER SKU

X130-2050 **Grey**

X130-2150 **White**

COLOR



MEDIUM BED • TYPE S • STONE VENEER MORTARS

Siena Medium M225

A polymer-modified medium bed mortar manufactured with portland cement to produce a high quality mortar with increased bond strength, easy adjustability, reduced lippage, greater open time and coverage than standard medium bed mortars. Siena Medium Set M225 is specially formulated for the installation of most large format and un-gauged tiles and stones without the need of leveling the receiving substrate. Siena Medium Set M225 can be used for interior and exterior application and on floors in residential and commercial projects. Siena Medium Set M225 can be use as a setting bed 3/16" up to 3/4" thick. For large format and un-gauged tiles and stone in vertical installs, use Siena Medium Set Pro M400 which contains non-slip/non-sag chemicals to help eliminate sliding. Siena Medium

Set M225 is available in white or gray, and complies with the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities


56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-4021**Grey**

X130-4020**White**

COLOR



Siena Medium Set Pro M400

A premium polymer-modified medium bed mortar manufactured with portland cement and proprietary additives to produce a high quality non-sag / non-slip mortar with increased bond strength, easy adjustability, reduced lippage, greater open time and coverage than standard medium bed mortars. Siena Medium Set Pro M400 is specially formulated with non-sag / non-slip properties for the installation of most large format and un-gauged tiles and stones without the need of leveling the receiving substrate. Siena Medium Set Pro M400 can be used for interior and exterior applications and on floors or walls in residential and commercial projects. On floors it can be used as a setting bed 3/16" up to 3/4" thick. Siena Medium Set Pro M400 is available

in white or grey, and complies with the requirements of ANSI A118.4 and A118.11.

Coverage

Notch Trowel – Coverage May Vary.

1/4" x 1/4" x 1/4" (6 x 6 x 6 mm) - 95 ft² (8.8 m²)

1/4" x 3/8" x 1/4" (6 x 9.5 x 6 mm) - 75 ft² (7.0 m²)

1/2" x 1/2" x 1/2" (13 x 13 x 13 mm) - 55 ft² (5.1 m²)

Packaging

50 lb (22.7 kg) bags

Pallet Quantities


56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU

X130-1050**Grey**

X130-1150**White**

COLOR

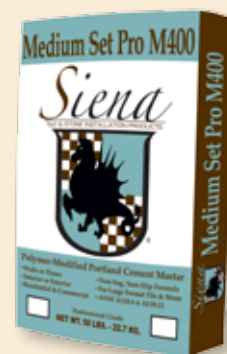

Siena Type S Mortar

A mixture of portland cement, lime, and sand to produce a high quality non-modified bonding and grouting mortar that has good workability, sag resistance, flexural and compressive strength. Ideal for use in bonding and grouting most lightweight natural and manufactured stone veneers, thin brick, precast, masonry brick and block to solid surfaces such as concrete, stucco brown coat and masonry in residential and commercial, interior and exterior projects. Siena Type S Mortar is available in grey, tan and 15 standard and custom colors. Siena Admix AX300 can be used with Siena Type S Mortar to create a polymer-modified

mortar for use on heavy stone installs or wherever polymer-modified mortars are required. Siena Type S Mortar exceeds ASTM C270.

Coverage – Coverage May Vary.

Average install – 20 to 25ft² (6 to 7.6m²)

Packaging

94 lb (43 kg) bags

Pallet Quantities

35 bags per pallet – 3,290 lbs (1,505 kg) net


SKU

X130-3004**Grey**

X130-2913**Tan**

X130-2856**All Colors**

COLOR

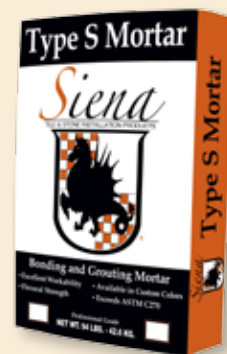

Siena Stone Veneer Mortar (SVM)

A premium mixture of portland cement, lime, and sand to produce a high quality non-modified bonding and grouting mortar that has excellent workability, sag resistance, greater open time, flexural strength and compressive strength than basic Type S mortars. It has been specifically designed for the installation of most natural and manufactured stone veneers, precast, thin brick, masonry brick and block to solid surfaces such as concrete, stucco brown coat and masonry in residential and commercial, interior and exterior projects. Siena Stone Veneer Mortar (SVM) is available in grey, tan and 15 standard and custom colors. Siena Admix AX300 can be used with Siena Stone Veneer Mortar (SVM) to create a

polymer-modified mortar for use on heavy stone installs or wherever polymer-modified mortars are required. Siena Stone Veneer Mortar (SVM) exceeds ASTM C270.

Coverage – Coverage May Vary.

Average install – 20 to 25ft² (6 to 7.6m²)

Packaging

94 lb (43 kg) bags

Pallet Quantities

35 bags per pallet – 3,290 lbs (1,505 kg) net

SKU

X130-3006**Grey**

X130-2914**Tan**

X130-2858**All Colors**

COLOR





VENEER MORTAR • SURFACE PREP • SELF-LEVELING UNDERLAYMENT



Sienna Premium Stone Veneer Mortar Polymer-Modified (PSVM)

A premium mixture of portland cement, lime, and sand to produce an exceptional polymer-modified bonding and grouting mortar that has excellent workability, sag resistance, greater open time and tensile strength, flexural strength and compressive strength than basic non-modified Type S mortars. It has been specifically designed for the installation of most natural and manufactured stone veneers, precast, thin brick, masonry brick and block to solid surfaces such as concrete, stucco brown coat and masonry in residential and commercial, interior and exterior projects. Sienna Premium Stone Veneer Mortar (PSVM) is available in grey and 15 standard plus custom colors, and is used


on heavy stone installs or wherever polymer-modified mortars are required. Sienna Premium Stone Veneer Mortar (PSVM) exceeds ASTM C270 requirements.

Coverage – Coverage May Vary.
Average install – 20 to 25ft² (6 to 7.6m²)

Packaging
94 lb (43 kg) bags

Pallet Quantities
35 bags per pallet – 3,290 lbs (1,505 kg) net

SKU	COLOR
X130-3010	Grey
X130-3024	All Colors



Sienna Deck Mud

A deck mud that is used to create a high strength cementitious substrate and setting bed for horizontal applications of most tile or stone installations. Designed for most interior and exterior, commercial and residential applications such as floors, shower pans, countertops, depressed slabs, and plywood substrates where a waterproof membrane is used. Sienna Deck Mud is a factory blended mortar consisting of portland cement which complies with ASTM C150 and graded sand which complies with ASTM C144.

Coverage – Coverage May Vary.
50 lb. bag: 1" (6.1 ft²), 1-1/2" (4.0ft²), 2" (3.0 ft²)
75 lb. bag: 1" (9.2 ft²), 1-1/2" (6.1ft²), 2" (4.5 ft²)

Packaging
50 lb (22.7 kg) bags and 75 lb (34 kg) bags.

Pallet Quantities
56 – 50 lb. bags per pallet, 2,800 lbs (1,271 kg) net
42 – 75 lb. bags per pallet, 3,750 lbs (1,700 kg) net

SKU	SIZE
X130-4000	50 lb.
X130-4001	75 lb.



Sienna Wall Float

A wall float designed to be used as a scratch and brown coat over open framing with metal lath to create a solid vertical substrate used for most tile and stone installations. Sienna Wall Float may be used for interior and exterior, residential and commercial applications on walls and ceilings. When Sienna Admix AX300 or AX400 are used in lieu of water with the Sienna Wall Float, flexibility, adhesion, and water resistance are improved. Sienna Wall Float is available in grey and is a mortar that consists of portland cement complying with ASTM C150, hydrated lime complying with ASTM C207, and sand complying with ASTM C144.

Coverage – Coverage May Vary.
50 lb. bag: 3/8" (16 ft²), 3/4" (8 ft²)
75 lb. bag: 3/8" (25 ft²), 3/4" (12.5 ft²)

Packaging
50 lb (22.7 kg) bags and 75 lb (34 kg) bags.

Pallet Quantities
56 – 50 lb bags per pallet, 2,800 lbs (1,271 kg) net
42 – 75 lb bags per pallet, 3,750 lbs (1,700 kg) net

SKU	SIZE
X130-4002	50 lb.
X130-4003	75 lb.



Sienna Self-Leveling Underlayment (SLU)

A rapid setting portland cement-based mortar designed to create a smooth, level surface prior to the application of a variety of flooring such as tile, stone, carpeting, marble, resilient floor, wood, parquet and other approved floor coverings. It is designed for fast leveling of floors from 0 - 3/4" with minimum time and labor. Surfaces can be walked on in 2 to 4 hours and the floor coverings can be installed within 12 to 24 hours. It can be used over concrete, plywood, terrazzo, quarry and tile in commercial and residential projects. Sienna Self-Leveling Primer must be applied prior to installing the Sienna Self-Leveling products.

Coverage – Coverage May Vary.
Thickness 1/8" - 60 ft² (5.7 m²)
Thickness 1/4" - 30 ft² (2.86 m²)

Packaging
50 lb (22.7 kg) bags

Pallet Quantities
56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU	COLOR
X130-4004	Grey



UNDERLAYMENT • PRIMER • WATERPROOFING • ANTI-FRACTURE

Siena Self-Leveling Underlayment (SL20)

A rapid setting portland cement-based mortar designed to create a smooth, level surface prior to the application of a variety of flooring such as tile, stone, carpeting, marble, resilient floor, wood, parquet and other approved floor coverings. It is designed for fast leveling of floors from 1/2" – 1 1/2" with minimum time and labor. Surfaces can be walked on in 2 to 4 hours and the floor coverings can be installed within 12 to 24 hours. It can be used over concrete, plywood, terrazzo, quarry and tile in commercial and residential projects. Siena Self-Leveling Primer must be applied prior to installing the Siena Self-Leveling products.

Coverage – Coverage May Vary.
Thickness 1/2" – 15 ft² (1.4 m²)
Thickness 1-1/2" – 5 ft² (0.5 m²)

Packaging
50 lb (22.7 kg) bags

Pallet Quantities
56 bags per pallet – 2,800 lbs (1,271 kg) net

SKU **COLOR**
X130-4010 **Grey**



Siena Self-Leveling Primer

A latex based primer for use with Siena Self-Leveling Underlayment products. It is solvent free and improves the underlayment's bond over porous substrates. This is a white liquid that dries clear. It is required that Siena Self-Leveling Primer be used in all self-leveling install projects. Specially formulated to promote the adhesion of Siena Self-Leveling Underlayment products to a variety of surfaces such as concrete, plywood, stone, tile, terrazzo, cement backer boards, pavers, brick, and other approved porous substrates.

Coverage – Coverage May Vary.
300 sq. ft. (28 m²) per gal. (3.8 L)

Packaging
1 gallon (3.8 L) jugs – 4 per case
5 gallon (18.9 L) pails.

Pallet Quantities
128 – 1 gal. jugs per pallet, 1,075 lbs (487 kg) net
32 – 5 gal. pails per pallet, 1,344 lbs (609 kg) net

SKU **SIZE**
X130-4006 **1 gal.**
X130-4005 **5 gal.**



Siena Dragon Skin Waterproof & Anti-Fracture Membrane

A premium ready to use, and IAPMO certified water-proofing and anti-fracture membrane, manufactured with latex polymers to produce a high quality elastomeric, and fast drying barrier. It's easily applied using a trowel, roller, paint brush or sprayer, and is available in both purple and white colors. Dragon Skin is used on recommended substrates as a barrier to water migration for load bearing tile and stone installations, and as an anti-fracture membrane used to prevent shrinkage or non-structural cracks up to 1/8" transmitting from the substrate through to the finished goods. Use polymer modified mortars meeting ANSI A118.4 or A118.11 for tile or stone installations over the Siena Dragon Skin membrane. Dragon Skin bonds to most surfaces, dries quickly (less than two hours), low VOC - has almost no odor, is not sticky or messy, and is ready to flood test in as little as 24 hours. Exceeds the requirements for ANSI A118.10 for waterproofing membranes, and ANSI

A118.12 for anti-fracture membranes. It can be used in residential, commercial, interior and exterior tile and stone installations. IAPMO has listed Siena Dragon Skin for use as a shower pan liner (IAPMO R&T File # 6892).

Coverage – Coverage May Vary.
(1 coat) 30 mil wet thickness: 100 ft² (9.3 m²) per gal.
(2 coat) 60 mil wet thickness: 50 ft² (4.6 m²) per gal.
Note: Waterproofing membrane must be two coats.

Packaging
1 gal. (3.8 L) jugs, 3.5 gal. (13.3 L) pails 5 gal. (18.9 L) pails.

Pallet Quantities
128 – 1 gal. jugs per pallet, 1,075 lbs (487 kg) net
48 – 3.5 gal. pails per pallet, 1,411 lbs (639 kg) net
32 – 5 gal. pails per pallet, 1,344 lbs (609 kg) net

SKU **SIZE**
X130-4007 **1 gal.**
X130-4008 **3.5 gal.**
X130-4009 **5 gal.**



Siena Fracture Shield Water Resistant & Anti-Fracture Membrane

A ready to use anti-fracture, crack isolation and water resistant membrane, manufactured with latex polymers to produce a high quality elastomeric barrier that protects tile and stone floors from cracks due to minor surface movement. Siena Fracture Shield is used on recommended substrates to prevent shrinkage or non-structural cracks up to 1/8" from transmitting from the substrate through the finished goods. Use polymer modified mortars meeting ANSI A118.4 or A118.11 for tile or stone installations over the Siena Fracture Shield membrane. Fracture Shield is easily applied with a trowel, roller or brush. Fracture Shield can be used in residential, commercial, interior and exterior tile and stone applications, and exceeds the crack isolation requirements of ANSI A118.12

Coverage – Coverage May Vary.
(1 coat) 30 mil wet thickness: 100 ft² (9.3 m²) per gal.
(2 coat) 60 mil wet thickness: 50 ft² (4.6 m²) per gal.

Packaging
1 gal. (3.8 L) jugs, 3.5 gal. (13.3 L) pails, 5 gal. (18.9 L) pails.

Pallet Quantities
128 – 1 gal. jugs per pallet, 1,075 lbs (487 kg) net
48 – 3.5 gal. pails per pallet, 1,411 lbs (639 kg) net
32 – 5 gal. pails per pallet, 1,344 lbs (609 kg) net

SKU **SIZE**
X130-4011 **1 gal.**
X130-4012 **3.5 gal.**
X130-4013 **5 gal.**





SURFACE SEALERS • GROUT RELEASES • GROUTS



Siena Masonry & Surface Sealer

A high quality silane/siloxane-based sealer designed to seal a variety of porous substrates including masonry, natural and manufactured stone, brick, block, unglazed tile and stone, stucco, and other cementitious surfaces. Siena Masonry & Surface Sealer is UV stable and will not yellow or degrade over time. When properly applied, Siena Masonry & Surface Sealer will offer long lasting protection from the elements, water and oil based stains, is vapor permeable, dries clear, and retains the surface's natural appearance.

Coverage – Coverage May Vary.

Approx: 100ft² to 200ft² (9.3m² to 18.6m²) per gal.

Packaging

1 gallon (3.8 L) jugs – 4 per case

5 gallon (18.9 L) pails.

Pallet Quantities

128 – 1 gal. jugs per pallet, 1,075 lbs (487 kg) net

32 – 5 gal. pails per pallet, 1,344 lbs (609 kg) net

SKU

SIZE

X136-4018 1 gal.

X136-4019 5 gal.



Siena Grout & Surface Sealer

A water-based sealer that offers protection against dirt, water, and stains when applied over porous surfaces, such as grout, tiles and stones. Siena Grout & Surface Sealer is for a wide variety of porous substrates and can be used in interior and exterior applications. It's highly vapor permeable, allows the receiving surface to naturally breath, EPA compliant and low odor. Siena Grout & Surface Sealer facilitates easy cleaning. Siena Grout & Surface Sealer is safe and easy to apply, dries clear with no sheen to preserve the natural look of the substrate.

Coverage – Coverage May Vary.

Approx: 100ft² to 200ft² (9.3m² to 18.6m²) per gal.

Packaging

1 gallon (3.8 L) jugs – 2 per carton

Pallet Quantities

128 per pallet – 3,290 lbs. (1,505 kg) net

SKU

SIZE

X136-1000 1 gal.



Siena Premium Sealer & Grout Release

A water-based, high performance sealer that offers superior protection against dirt, water, and oil stains when applied over porous surfaces, such as grout, tiles and stones. Siena Premium Sealer & Grout Release is for a wide variety of porous substrates and can be used in interior and exterior applications. This long-lasting sealer is highly vapor permeable, allows the receiving surface to naturally breath, EPA compliant and low odor. Siena Premium Sealer & Grout Release facilitates easy cleaning and can also be used as a grout release making grout cleaning easy. Siena Premium Sealer &

Grout Release is safe and easy to apply, dries clear with no sheen to preserve the natural look of the substrate.

Coverage – Coverage May Vary.

Approx: 100ft² to 200ft² (9.3m² to 18.6m²) per gal.

Packaging

1 quart (.95 L) bottles – 8 per carton

1 gallon (3.8 L) jugs – 2 per carton

Pallet Quantities

128 1 gal. jugs per pallet – 3,290 lbs. (1,505 kg) net

SKU

SIZE

X136-1001 1 qt.

X136-1002 1 gal.



Siena Non-Sanded Grout NS200

A polymer-enhanced premium grout manufactured with portland cement to produce a high quality grout that requires only the addition of water. Siena Non-Sanded Grout NS200 is used for grouting tile joints 1/16" up to 1/8" wide in interior and exterior applications of most tiles and stones. Siena Non-Sanded Grout NS200 can be used on floors and walls in residential and commercial projects. Siena Non-Sanded Grout NS200 is mildew resistant, efflorescence resistant, available in 36 premium colors, and complies with the requirements of ANSI A118.6. Siena Admix AX100 is specially formulated to be used in combination with Siena Grouts to increase

water retention, impart greater flexibility, improve bond strength, and surface appearance. *NOTE: Do not use any non-Siena brand additives with Siena Grouts.*

Coverage

See grout chart on page 12.

Packaging

5 lb (2.27 kg) or 10 lb (4.5 kg) bags

Case Quantities

4 per case. 5 lb – 20 lbs (9 kg) net

4 per case. 10 lb – 40 lbs (18.1 kg) net

SKU

COLOR

See Price List All 36 Colors



GROUTS • CAULKS • STAINS

Siena Epoxy Grout & Mortar

A 100% solid epoxy that can be used as a grout or a mortar. Siena Epoxy Grout & Mortar can be used for setting and grouting tiles and stones, glass and metals, pavers, marbles and more over a variety of substrates. Siena Epoxy Grout & Mortar produces a high strength mortar and grout that is impermeable, stain and shock resistant. It has exceptionally high chemical resistance to many acids, alkalis, solvents and stains, making it ideal for usage in areas such as commercial kitchens, hospitals, countertops, floors and walls, interior and exterior, residential and commercial applications, and any area where the use of strong chemicals cause erosion and damage to traditional cementitious mortars beds and grout joints. Siena Epoxy Grout & Mortar conforms to the requirements for chemical-

resistant, water cleanable, tile setting and grouting epoxy found in ANSI A118.3 and ANSI A108.6.

Coverage

See grout chart on page 12.

Packaging

1/2 gal. (1.89 L) pail, 1 gal. (3.78 L) pail, 2 gal. (7.56 L) pail

Pallet Quantities

48 – 1/2 gal. pails per pallet, 792 lbs (359 kg) net

32 – 1 gal. pails per pallet, 1,056 lbs (478 kg) net

32 – 2 gal. pails per pallet, 2,112 lbs (956 kg) net

SKU

SIZE

See Price List 1/2 gal.

See Price List 1 gal.

See Price List 2 gal.



1 GAL. KIT CONTENTS:
PART A - 1 Quart of Epoxy Resin (2 lbs.)
PART B - 1 Pint of Hardener/color (1 lb.)
PART C - Silica (10 lbs.)

Siena Sanded Grout GS300

A polymer-enhanced premium grout manufactured with portland cement to produce a high quality grout that requires only the addition of water. Siena Sanded Grout GS300 is used for grouting tile joints 1/8" up to 1/2" wide in interior and exterior applications of most tiles and stones. Siena Sanded Grout GS300 can be used on floors and walls in residential and commercial projects. Siena Sanded Grout GS300 is mildew resistant, efflorescence resistant, available in 36 premium colors, and complies with the requirements of ANSI A118.6. Siena Admix AX100 is specially formulated to be used in combination

with Siena Grouts to increase water retention, impart greater flexibility, improve bond strength and surface appearance. *NOTE: Do not use any non-Siena brand additives with Siena Grouts.*

Coverage

See grout chart on page 12.

Packaging

25 lb (11.35 kg) bags


Pallet Quantities

100 bags per pallet – 2,500 lbs (1,135 kg) net

SKU

COLOR

See Price List All 36 Colors



Siena Caulk CX300 – Sanded or Smooth

A siliconized acrylic latex caulk formulated for ease of use, durability and resists mold and mildew. Siena Caulk CX300 is flexible, long lasting and gives a water tight seal that resists cracking on most materials such as tile, stone, wood, porcelain, glass and metal. Siena Caulk CX300 can be used to seal around sinks, tubs, showers, countertops, baseboards, windows and door frames. Siena Caulk CX300 is an exceptional adhesive for tile, glass, wood, metal, and is ideal for setting marble vanity tops to their bases.

It is available in both sanded and smooth textures and in all of Siena's 36 premium colors.

NOTE: Not for exterior use, or constant water exposure.

Coverage

Approximately 25 linear feet (7.62 m) per cartridge for a 1/4" x 1/4" (6 x 6 mm) joint. Maximum joint width and depth should not exceed 1/4" (6 mm).

Packaging

10.5 fl.oz. (310 ml) bottle.

Case & Pallet Quantities

10 per case, 500 per pallet

SKU

COLOR

See Price List All 36 Colors



Siena Grout Stain ST300

A long lasting, waterborne urethane acrylic used to change and renew the color of sanded or non-sanded grout joints. It also seals and protects grout from moisture and staining. Siena Grout Stain ST300 is available in all of Siena's 36 premium grout colors. Siena Grout Stain ST300 can be used to change and renew the color of sanded and non-sanded grout joints from dark to light colors, or light to dark colors.

Coverage – Coverage May Vary.

Per 8 fl. oz. (240 ml)

4" x 4" tile x 1/4" joint - 80 ft²

6" x 6" tile x 1/4" joint - 90 ft²

12" x 12" tile x 1/4" joint - 125 ft²

Packaging

8 fl.oz. (240 ml) bottle.

Case & Pallet Quantities

12 per case, 480 per pallet

SKU

COLOR

See Price List All 36 Colors





ADMIXES • HARDIEBACKER • WARRANTY



Siena Admix AX100 Admixture

An acrylic admixture manufactured with high quality polymers to produce a light-duty admixture for Siena Grouts and dry-set mortars. Siena Admix AX100 promotes increased flexibility, adhesion, surface appearance, and bond strength when used with Siena grouts and mortars. Siena Admix AX100 can be used to enhance the performance, density, flexibility and adhesion of non-modified mortars, such as Siena ThinSet 510, Premium Set 550, Siena Type S and Siena Stone Veneer Mortars (SVM). Siena Admix AX100 complies with ANSI A118.4 and A118.6.

Use with non-modified grouts or mortars only.

Packaging

1 gallon (3.8 L) jugs – 4 per case
5 gallon (18.9 L) pails.

Pallet Quantities

128 – 1 gal. jugs per pallet, 1,088 lbs (493 kg) net
32 – 5 gal. pails per pallet, 1,360 lbs (616 kg) net

SKU

X130-0307	1 gal.
X130-0309	5 gal.

SIZE



Siena Admix AX300 Admixture

A premium acrylic admixture manufactured with high quality polymers to produce a high strength admixture for Siena dry-set mortars and masonry mortars. Siena Admix AX300 promotes increased flexibility, adhesion, surface appearance, and bond strength when used with Siena mortars. Siena Admix AX300 can be used to enhance the performance, density, flexibility and adhesion of non-modified mortars, such as Siena ThinSet 510, Premium Set 550, Siena Type S and Siena Stone Veneer Mortar (SVM). Siena Admix AX300 complies with ANSI A118.4 and A118.6.

Use with non-modified grouts or mortars only.

Packaging

1 gal. (3.8 L) jugs, 4 per case
2.5 gal. (7.6 L) pails, 2 per case
5 gal. (18.9 L) pails.

Pallet Quantities

128 – 1 gal. jugs per pallet, 1,088 lbs (493 kg) net
64 – 2.5 gal. pails per pallet, 1,363 lbs (618 kg) net
32 – 5 gal. pails per pallet, 1,366 lbs (619 kg) net

SKU

X130-0301	1 gal.
X130-0302	2.5 gal.
X130-0303	5 gal.

SIZE



Hardiebacker Board

Hardiebacker board offers the most flexural and compressive strength available, while being the lightest cement board on the market. No other board offers a cement formulation with a smooth surface that can be painted, textured, tiled or wallpapered. Hardiebacker board passes both industry tests with a perfect score, providing the ultimate in durability, moisture resistance, and protection against mold growth. It contains no gypsum, paper facing, or abrasive aggregate.

Packaging

1/4" thick sheets
1/2" thick sheets

Pallet Quantities

1/4" – 50 sheets, weight 1,500 lbs. (675 kg) net
1/2" – 30 sheets, weight 1,650 lbs. (742.5 kg) net

SKU

X250-0033	1/4" Thick
X250-0036	1/2" Thick

SIZE

Let us help you with your next event!

- Special Siena Selling Events – On-Site
- Hands-On Demonstrations – Lunch & Learn
- Product Knowledge Classes – Customers & Staff
- Special Promotions – Raffles, Coupons, etc.
- Selling Tools – Flyers, Posters, Product Samples
- In-Store Displays, Banners, and so much more . . .

For more info contact your local Siena Representative or Christine Camponovo at 800.600.6634 or CCamponovo@omega-products.com





Visit Siena Products on the Web

www.SienaProducts.com

Access Siena's information on our full line of thin and medium set specialty mortars, waterproofing and anti-fracture membranes, self-leveling, deck muds and wall floats, stone veneer and Type S mortars, grouts, caulking sealers and admixtures.

KEY FEATURES:

- Complete, updated product catalogs
- Contact and sales person information
- Sample grout colors
- Technical data and bulletins
- Project photo galleries
- Distributor locators
- Material Calculator
- Product Data and MSDS



BUYER'S GUIDE 2015

NOW AVAILABLE • ASK FOR YOUR FREE COPY

THE PROFESSIONAL'S CHOICE SINCE 1974

WALL SYSTEMS

- EIFS
- One and Three Coat
- Crack Isolation

FINISHES

- Stucco
- Textured Acrylics
- Coatings

ABC'S

- Admixtures
- Bonders
- Cleaners
- Sealers

OTHER PRODUCTS

- Architectural foam coatings
- Water-resistive/Air barriers

The Art of Stucco Wall Systems



MANUFACTURING A FAMILY OF PREMIUM PRODUCTS TO MEET YOUR WALL SYSTEM NEEDS

For more information visit www.omega-products.com or email us at: info@omega-products.com



GROUT COVERAGE CHARTS

SUPERIOR STRENGTH - SUPERIOR QUALITY

COVERAGE:

Actual coverage may vary according to job conditions.
This information should be used only as a guideline.

Approximate coverage in ft² per lb and in m² per kg

TILE SIZE	EPOXY & SANDED GROUT - JOINT WIDTH									
	1/8" (3.2mm)		3/16" (4.8mm)		1/4" (6.3mm)		3/8" (9.5mm)		1/2" (12.7mm)	
	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg
1"x1"x1/4" 25x25x6mm	1.8	0.37	1.2	0.25	0.9	0.18	0.6	0.12	0.5	0.09
4"x4"x1/4" 100x100x6mm	7.2	1.47	4.8	0.98	3.6	0.74	2.4	0.49	1.8	0.37
8"x8"x1/4" 200x200x6mm	14.4	2.95	9.6	1.96	7.2	1.47	4.8	0.98	3.6	0.74
12"x12"x3/8" 300x300x9mm	14.4	2.95	9.6	1.96	7.2	1.47	4.8	0.98	3.6	0.74
16"x16"x3/8" 400x400x9mm	19.2	3.93	12.8	2.62	9.6	1.96	6.4	1.31	4.8	0.98
18"x18"x1/2" 450x450x12mm	16.2	3.31	10.8	2.21	8.1	1.66	5.4	1.1	4.1	0.83

Approximate coverage in ft² per lb and in m² per kg

TILE SIZE	NON-SANDED GROUT - JOINT WIDTH					
	1/16" (1.6mm)		3/32" (2.4mm)		1/8" (3.2mm)	
	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg	ft ² /lb	m ² /kg
1"x1"x1/4" 25x25x6mm	5	1.02	3.3	0.68	2.5	0.51
4"x4"x1/4" 100x100x6mm	20	4.09	13.3	2.73	10	2.05
8"x8"x1/4" 200x200x6mm	40	8.18	26.7	5.46	20	4.09
12"x12"x3/8" 300x300x9mm	40	8.18	26.7	5.46	20	4.09
16"x16"x3/8" 400x400x9mm	53.3	10.91	35.6	7.27	26.7	5.46
18"x18"x1/2" 450x450x12mm	45	9.21	30	6.14	22.5	4.6

Manufactured by Omega Products International, Inc.

AVAILABLE IN 36 PREMIUM COLORS

Siena Grout Color Selection Kit



- All 36 Siena Grout Colors in one place
- Easy to use 1/4" wide plastic grout strips
- Convenient plastic case for years of protection
- Textured finish for accurate grout color samples
- Great in-store counter display stand alone
- Order one for all your tile and stone contractors

Ask your Salesperson for yours today



DragonSkin and FractureShield Sample Cards Are Available

Order your free sample cards of DragonSkin and FractureShield complete with a product sample stapled to each card. This allows your customers to touch the product before purchasing; giving them the information they need to make a buying decision. Call or email to order your supply today.

Treat your customers to the best!

We have co-op opportunities available to co-brand your company name with the best name in tile and stone installation products . . . Siena. Our Siena line of fine apparel is made of top brand-name manufacturers for years of comfortable wear. Your customers will love the fit and feel of 100% cotton T-shirts; and our cotton-blend flex-fitted caps are top quality for long-lasting style. Also available, co-brand on our 5 gallon buckets for years of job site visibility and name recognition.

Call us today at 800.600.6634
or email us at Siena@omega-products.com.



Demand the Highest Quality!

Taking Tile & Stone Installation Products from Ordinary to Extraordinary



Siena Caulk CX300
in 36 colors



Siena Glass Tile Pro M375



Siena Multi Plus Pro M200



Siena Non-Sanded Grout
NS200 • 36 colors



Siena Wall Float



Siena Sanded Grout
GS300 • 36 colors



Siena DragonSkin
Waterproof & Anti-Fracture
Membrane



Siena Premium Sealer
and Grout Release



Siena Deck Mud

Siena Has Complete System Solutions

SienaProducts.com
for more info call: 800.600.6634
or email us at: siena@omega-products.com

SCAN THIS QR CODE



FOR OUR MATERIAL
CALCULATOR